


Braided Flat SPT-2 PVC Power Cable Product Range: *BOV*

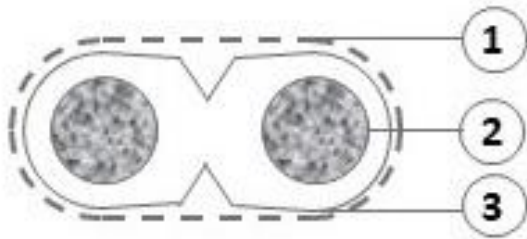

SCHEMATIC DRAWING

2 Core Flat construction

CABLE CONSTRUCTION

1. Viscose Rayon braid
2. Class 5 flexible copper conductor
3. PVC SPT-2 insulation

APPLICATIONS

This product is designed for use as a flexible cord for small appliances and lamps, utilising voltages below 300 V and temperatures below 105 °C

Characteristics

Voltage Rating	300V
Working Temperature:	+105°C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Outer Diameter [mm]
BOV-925	2 x 18	48 x 0.15	4.4 x 7.5 ± 0.2

Cable Standards	UL 62 CSA 22.2
Stranding of Conductor	Tin-plated copper stranded conductor.
Insulation	PVC SPT-2 type insulation.
Cable Assembly	The cores are parallel.
Core Identification	2 Core: Black ●

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours. Please contact us for a list of available colours.

Revision Date:
08/03/2018

Issue No.
1.1

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.