



Braided Round PVC + PVC SPT Power Cable Product Range: *BOV*

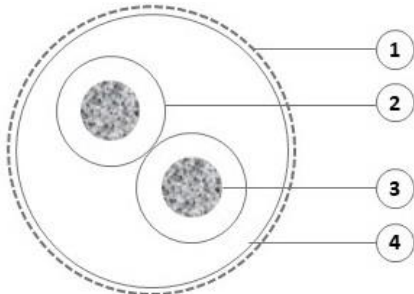

SCHEMATIC DRAWING

Left: 2 core round construction

Right: 3 core round construction

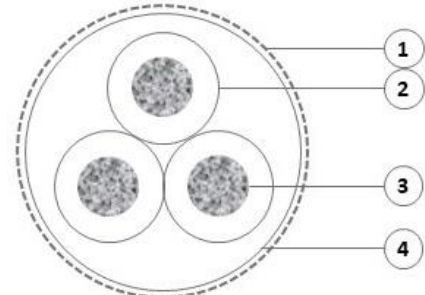

CABLE CONSTRUCTION

1. Viscose Rayon braid
2. PVC insulation
3. Flexible copper conductor
4. PVC SPT insulation



APPLICATIONS

SVT cord is suitable for use in table and floor lamps, pendant lighting and household appliances (cord rating must match load of appliance)

Characteristics

Voltage Rating	300V
Working Temperature:	+105°C

Flexform Product Code	Size Conductor [AWG]	Conductor Stranding [N° x mm]	Outer Diameter [mm]
BOV-926	2 x 18	48 x 0.15	6.7 ± 0.2
BOV-927	3 x 18	48 x 0.15	7.2 ± 0.2

Cable Standards	UL 62/1581 CSA 22.2
Stranding of Conductor	Tin-plated copper stranded conductor.
Insulation	PVC + PVC SVT type insulation.
Cable Assembly	The cores are twisted.
Core Identification	2 Core: Black ● White ○ 3 Core: Black ● White ○ Yellow/Green ●
Sheath Colour	Black

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours. Please contact us for a list of available colours.

Revision Date:
09/03/2018

Issue No.
1.1

Page:
1 of 1

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.