



Round 18AWG UL Style Twisted Cord Overbraided in Viscose Rayon Product Range: *BTW*

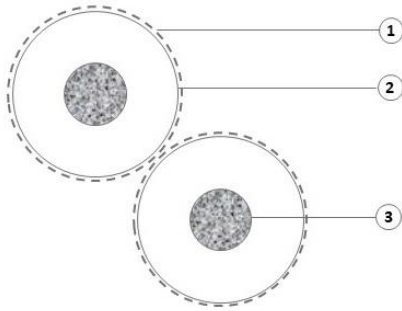

SCHEMATIC DRAWINGS

Left: 2 core twisted construction
Right: 3 core twisted construction

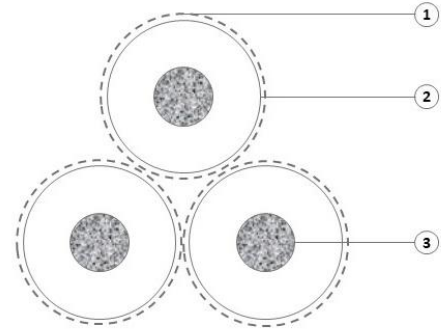

CABLE CONSTRUCTION

1. Viscose rayon braid
2. 70 °C PVC thin sheath
3. Transparent TI3 type PVC insulation

APPLICATIONS

This product is designed for use as a pendant or a flexible cord for table or floor lamps, or similar light, portable apparatus, where there is a low risk of damage or mechanical abuse.

<u>Characteristics</u>	
Working Voltage:	600 V
Working Temperature:	105 °C

Note: The cable is produced using UL recognised PVC appliance wiring conductors. This is only applicable to the 105 °C single insulated PVC conductor over which the braid is applied. The overall cable construction is not approved by UL.

Revision Date:
03/07/2017

Issue No.
1.0

Page:
1 of 2

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.

Flexform Product Code	Size Conductor [AWG]	Conductor Strand [mm]	Outer Diameter [mm]
BTW-955	2 x 18	28 x 0.193	5.5 ± 0.2
BTW-956	3 x 18	28 x 0.193	5.5 ± 0.2

All versions of this cable can be ordered with a plain or patterned viscose rayon textile braid, available in over 60 colours.
Please contact us for a list of available colours.

Cable Standards

UL 758/1581 (Conductor only)
CSA 22.2 n. 210.5 (Conductor only)
AWM style 1015 (Conductor only)

Stranding of Conductor

Tin-plated copper conductor

Insulation

105 °C PVC insulation.

Cable Assembly

The cores are braided in Viscose Rayon and twisted together.

Core Identification

2 Core: Brown ● Blue ●
3 Core: Brown ● Blue ● Yellow/Green ●

Revision Date:
03/07/2017

Issue No.
1.0

Page:
2 of 2

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.