


Multi Conductor Cables Insulated in PVC + PVC H03 70°C Product Range: *GOL-F*



SCHEMATIC DRAWINGS

2 Core Flat Construction

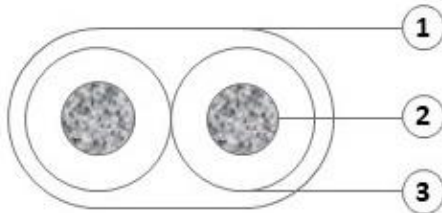

CABLE CONSTRUCTION

1. 70 °C PVC outer insulation
2. 70 °C PVC inner insulation
3. Red copper conductor

APPLICATIONS

This product is designed for use as a pendant or a flexible cord for table or floor lamps, or similar light, portable apparatus, where there is a low risk of damage or mechanical abuse.

Characteristics

Voltage Rating (U₀/U):	300 / 300 V _{ac}
Working Range:	70 °C

Size Conductor [mm ²]	Conductor Stranding [N° x mm]	Electrical Resistance [Ω/Km]
0.50	16 x 0.20	≤ 39.0
0.75	24 x 0.20	≤ 26.0

Revision Date:
06/07/2017

Issue No.
1.0

Page:
1 of 2

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.

Flexform Product Code	Size Conductor [mm ²]	Outer Diameter [mm]
GOL-022F	2 x 0.50	3.2 x 5.2 ± 0.2
GOL-023F	2 x 0.75	3.5 x 5.6 ± 0.2

Cable Standards	BS EN 50525-2-11:2011 BS EN 60228:2004 Low Voltage European Directive No. 2014/35/UE.
Stranding of Conductor	Red copper stranded conductor
Insulation	TI2 type PVC compound.
Cable Assembly	The cores are parallel.
Core Identification	2 Core: Brown ● and Blue ●
Outer Sheath	TM2 type PVC compound
Colour of Sheath	Gold ●

Revision Date:
06/07/2017

Issue No.
1.0

Page:
2 of 2

In order to improve our products, the information contained in this technical datasheet can be changed without notice. Please check periodically with our office, the date and issue number.